For Sales and Support call KMParts.com (866) 595-9616

Shunt release, up to 63 A, 12-110V, 1HP

Part no.	**FAZ-XAA-C-12-110VAC**
Article no.	**278518**
Catalog No.	**FAZ-XAA-C-12-110VAC**

Powering Business Worldwide

Delivery program

Basic function			Accessories for miniature circuit breaker
Basic function accessories			Shunt release
Product range			Accessory
Contact sequence			

Technical data

Electrical

Voltage range		V AC	12 … 110 110 … 415
Rated frequency	f	Hz	50/60

Mechanical

Standard front dimension		mm	45
Enclosure height		mm	80
Mounting width		mm	17.5 (1 space unit)
Mounting			IEC/EN 60715 top-hat rail
Degree of protection			
Integrated			IP40
Terminal protection			Protection against electric shock to IEC 536
Terminals			Twin-purpose terminals
Terminal capacities		mm^2	
Solid		mm^2	1 … 2.5
flexible		mm^2	1 … 2.5
Tightening torque of terminal screws		Nm	2.4

Design verification as per IEC/EN 61439

Technical data for design verification			
Operating ambient temperature min.		°C	-5
Operating ambient temperature max.		°C	40

Technical data ETIM 6.0

Devices for distribution board-/surface mounting (EG000062) / Auxiliary contact unit for distribution board (EC001286)

Electric engineering, automation, process control engineering / Electrical installation, device / Breaker switch component / Auxiliary contact unit for distribution board (ecl@ss8.1-27-14-35-02 [AKE327010])

Device fitting			Miniature circuit breaker (MCB)
Additional equipment			Shunt release (for power circuit breaker)
Attached at delivery			No
Assembly width (TE)			1
Number of normally open contacts			0
Number of normally closed contacts			0

For Sales and Support call KMParts.com (866) 595-9616

Number of change-over contacts		0
Number of fault-signal switches		0
Rated switch current	A	0
Nominal rated voltage	V	110
Control voltage type		AC
With autotest for earth leakage function		No
Suitable for max. number of poles main contact unit (total)		1
Suitable for max. current main contact unit	A	0

Dimensions

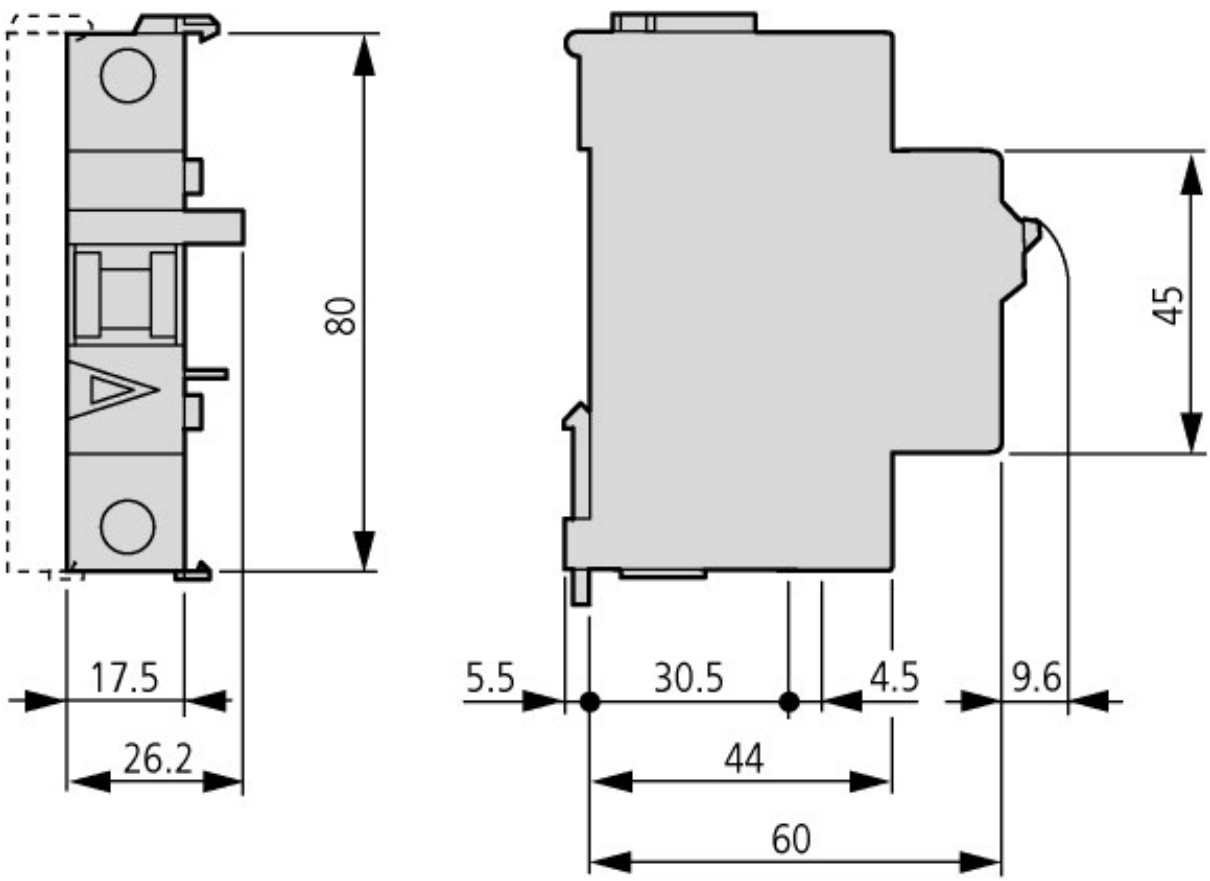

Additional product information (links)

AWA1220-1777 Shunt and undervoltage release	
AWA1220-1777 Shunt and undervoltage release	ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/17770301.pdf

© 10/2016 by Eaton Industries GmbH